

Flashings and closures are made for particular applications and locations on the roof, with variations to suit the specific profile being used.

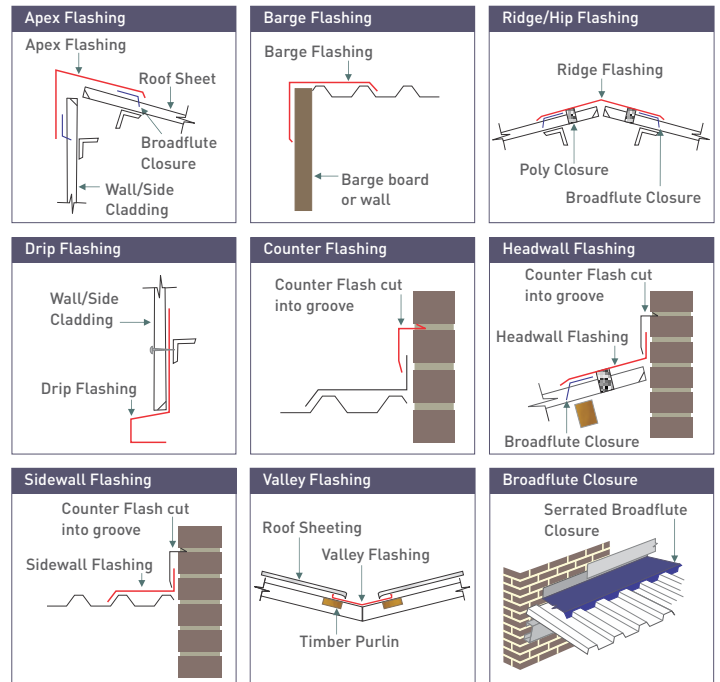
Industrial and commercial flashings tend to be functional more than aesthetic, and Safintra makes a range of standard flashings which are suitable for this purpose.






Residential flashings however, usually have an important aesthetic role which necessitates that they are designed for the structure in question.
















Safintra is able to produce most custom designed flashings for residential and other applications- please ask your local branch for more information.

Flashings are usually made in the same material as the roof, for colour matching. Safintra flashings are offered in Aluminium-Zinc coated steel and Aluminium. All counter flashings are sealed with silicone - not cement.

Please speak to our flashings departments for further guidance and technical assistance.



PIERCED FIX		TUFDEK ^{BR}	WIDEDEK	FLUTELINE	Trimflute	classiccrr ^{corrugated}
Apex Flashing 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231	231 x 231	231 x 231
	Angle	As required				
	Girth	462	462	462	462	462
Barge Flashing 	Dimensions (A x B)	231 x 231	231 x 231	231 x 300	217 x 245	231 x 231
	Angle	90°	90°	90°	90°	90°
	Girth	462	462	462	462	462
Ridge Flashing 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231	231 x 231	231 x 231
	Angle	140°	140°	140°	140°	140°
	Girth	462	462	462	462	462
Comments	Use with fluted closure.			No closure.		
Roll Top Ridge Flashing 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231	231 x 231	231 x 231
	Angle	140°	140°	140°	140°	140°
	Girth	462	462	462	462	462
Comments	Use with fluted closure.			No closure.		
Hip Cap 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231	231 x 231	231 x 231
	Angle	128°	128°	128°	128°	128°
	Girth	462	462	462	462	462
Comments	Use with fluted closure.			No closure.		

PIERCED FIX		TUFDEK 	WIDEDEK 	FLUTELINE 	Trimflute 	classi corr  corrugated
Broad Flute Closure 	Length of closure	686	760	889	N/A	N/A
	Comments	Need one closure per roof sheet.			No closure	
Drip Flashing 	Dimensions (A x B x C x D)	60 x 50 x 20 x 24	111 x 60 x 25 x 35	60 x 50 x 20 x 24	111 x 60 x 25 x 35	111 x 60 x 25 x 35
	Angle	92°	92°	92°	92°	92°
	Girth	154	231	154	231	231
Counter Flashing 	Dimensions (A x B)	30 x 112	30 x 112	30 x 112	30 x 112	30 x 112
	Angle	(i)22.5° (ii)88°	(i)22.5° (ii)88°	(i)22.5° (ii)88°	(i)22.5° (ii)88°	(i)22.5° (ii)88°
	Girth	154	154	154	154	154
Headwall Flashing 	Dimensions (A x B)	75 x 231	75 x 231	75 x 231	75 x 231	75 x 231
	Angle	As required				
	Girth	308	308	308	308	308
Side Wall Flashing 	Dimensions (A x B)	77 x 221	77 x 221	75 x 300	63 x 245	77 x 221
	Angle	90°	90°	90°	90°	90°
	Girth	298	298	298	308	308
External Corner 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231	231 x 231	231 x 231
	Angle	90°	90°	90°	90°	90°
	Girth	462	462	462	462	462
Internal Corner 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231	231 x 231	231 x 231
	Angle	90°	90°	90°	90°	90°
	Girth	462	462	462	462	462
Valley Flashing 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231	231 x 231	231 x 231
	Angle	128°	128°	128°	128°	128°
	Girth	462	462	462	462	462
Roll Top Valley Flashing 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231	231 x 231	231 x 231
	Angle	140°	140°	140°	140°	140°
	Girth	462	462	462	462	462
Under-Over Flashing 	Dimensions (A x B)	150 x 287	150 x 287	150 x 287	150 x 287	150 x 287
	Angle	128°	128°	128°	128°	128°
	Girth	437	437	437	437	437

All dimensions given in millimetres